

# PUSH BUTTON EMERGENCY GENERATOR STOP SWITCH

## Description:

Yellow nonmetallic NEMA 4X enclosure. Accepts one to three contact blocks. Labeled EMERGENCY GENERATOR STOP and PUSH BUTTON. Red operator is labeled PULL TO RESET.


## Electrical Characteristics:

Contact blocks (normally open P/N PILNOCB and/or closed P/N PILNCCB)\* Sold Separately  
Screw and captive clamp terminals. Min: 1 X 24 AWG Max: 2 X 16 AWG  
600 Vac @ 1.2 Amp 250 Vdc at 0.27Amp 120 Vdc @ 0.55 Amp

## Specification:

PUSH BUTTON EMERGENCY GENERATOR STOP P/N GS120 uses a single push button operating mode. Using a maintained (push-pull) red 40mm mushroom operator hot stamped PULL TO RESET on the mushroom face. The operating mode reverses the nominal state of the installed contact blocks such that type contact blocks remain open/closed when the operator is pressed or pulled to reset. Contact blocks are not included and must be ordered as an option.

## P/N GS120

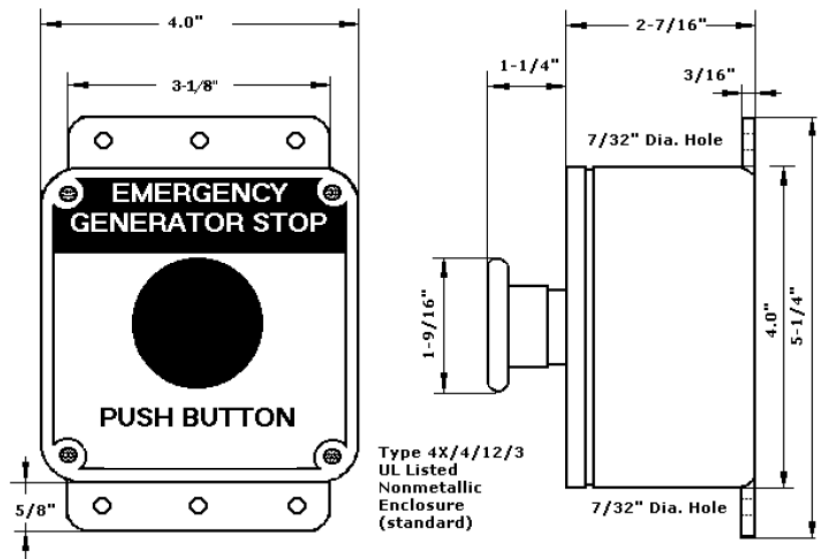

[www.davidsonsales.com](http://www.davidsonsales.com)

839 Bill France Blvd., Daytona Beach, FL 32117

Phone (386)274-2079 Phone (800)383-2078

Fax (386)274-2279 Fax (800)475-2279