


# P6-700.3F STANDARD REMOTE ANNUNCIATOR

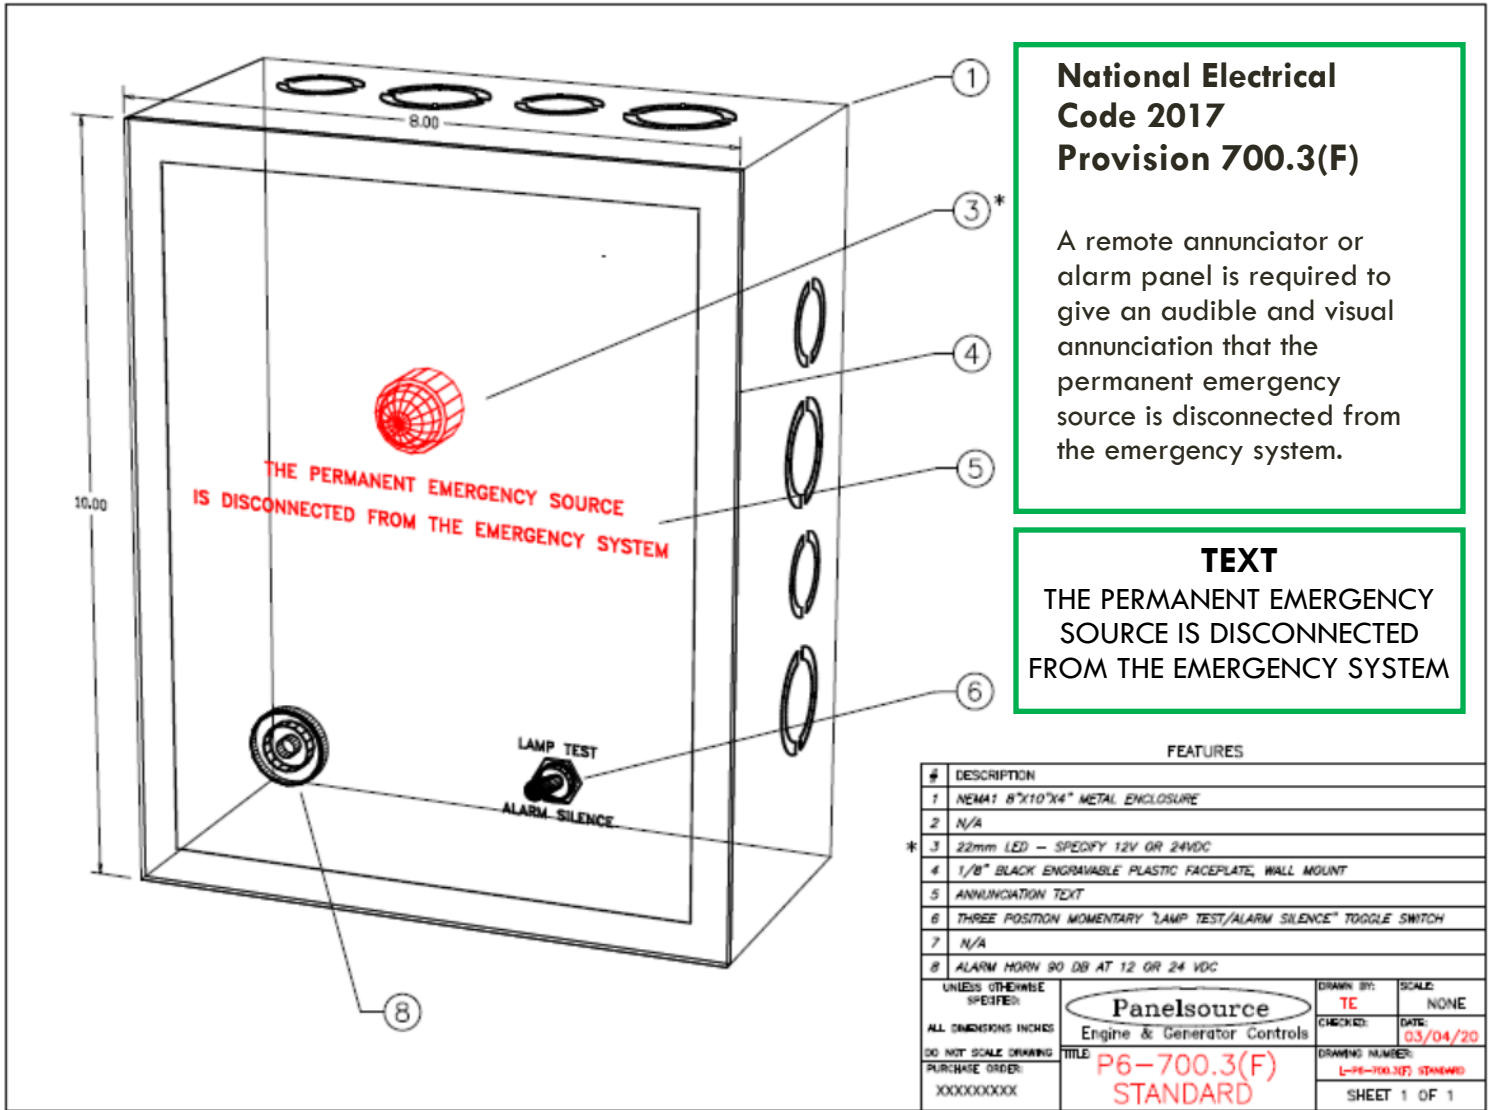

**National Electrical Code 2017 Provision 700.3(F)**

A remote annunciator or alarm panel is required to give an audible and visual annunciation that the permanent emergency source is disconnected from the emergency system.

**TEXT**

THE PERMANENT EMERGENCY SOURCE IS DISCONNECTED FROM THE EMERGENCY SYSTEM

FEATURES	
#	DESCRIPTION
1	NEMA 1 8"X10"X4" METAL ENCLOSURE
2	N/A
3	22mm LED - SPECIFY 12V OR 24VDC
4	1/8" BLACK ENGRAVABLE PLASTIC FACEPLATE, WALL MOUNT
5	ANNUNCIATION TEXT
6	THREE POSITION MOMENTARY "LAMP TEST/ALARM SILENCE" TOGGLE SWITCH
7	N/A
8	ALARM HORN 90 DB AT 12 OR 24 VDC

UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS INCHES DO NOT SCALE DRAWING PURCHASE ORDER: XXXXXXXXXXX	 Engine & Generator Controls <b style="color: red; font-size: 1.2em;">P6-700.3(F) STANDARD</b>	DRAWN BY: TE SCALE: NONE CHECKED: DATE 03/04/20 DRAWING NUMBER: L-PE-700.3F STANDARD SHEET 1 OF 1
--	--	---

### STANDARD FEATURES

- Engraved 3-Ply Plastic
- Single 22 mm Red LED
- Visual & Audible Indication
- Alarm Silence / Lamp Test Switch
- Input Selectable Horn
- Surface Mount
- NEMA 1 8" X 10" X 4" Enclosure
- DC Positive Input Switching
- 12 or 24 Volts DC
- Fully Sealed Logic Module

### OPTIONAL

- Flush Mount
- Inverter for DC Negative Inputs