


# The L Gauge


*Economical and Reliable*

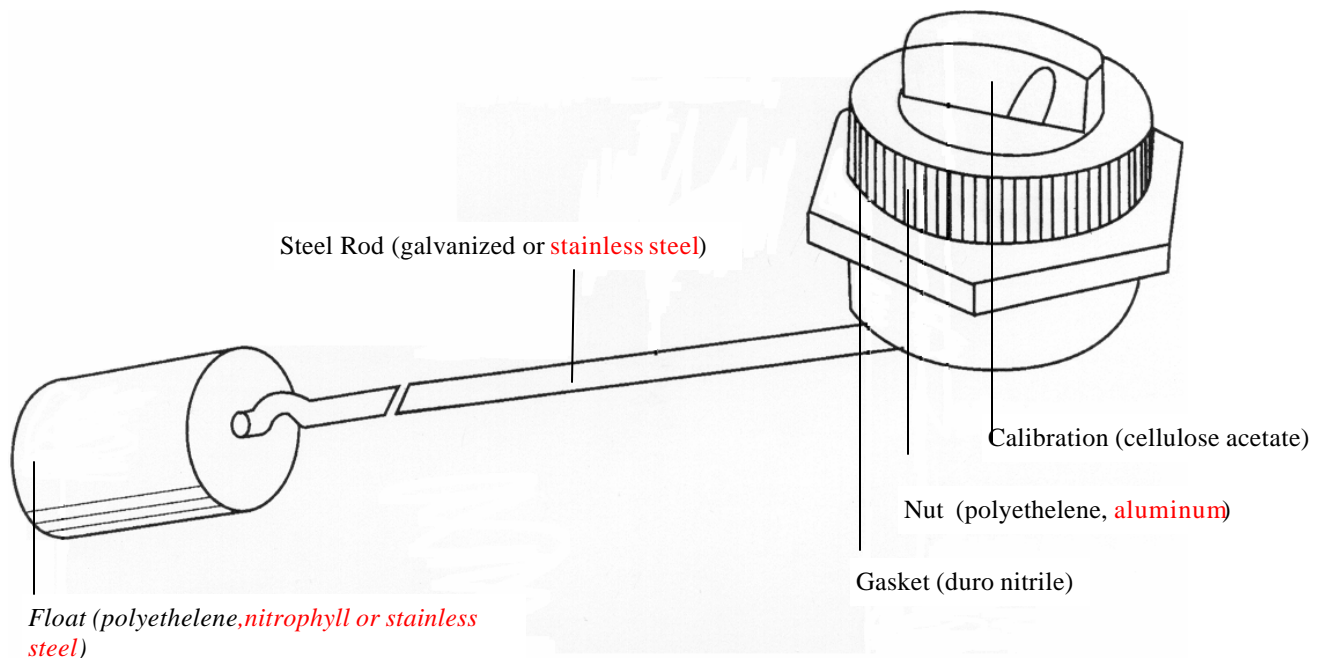

One of our most reliable and economical gauges is recommended for small tank applications with depths of 6" up to 30".

- Highly visible top reading gauge.
- Tough, acrylic calibration dome.
- Available in 1 5/16", 1 1/2", and 2" openings.

*Please specify tank depth and size of opening when ordering.*

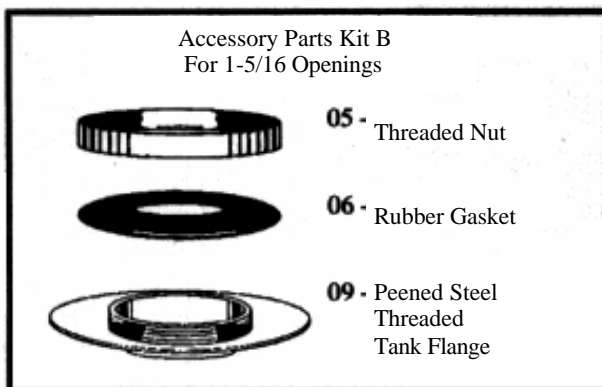

## KRUEGER **SENTRY** GAUGE

**KRUEGER SENTRY GAUGE CO. INC.**  
1873 Siesta Lane: Green Bay, WI 54313-8021  
Phone:(920) 434-8860 : Fax (920) 434-8897  
Office Hours: 7:00 A.M. to 5:00 P.M. (CST)  
<http://www.kruegersentrygauge.com>

# The L Gauge

---

- A. **CALIBRATION ASSEMBLY:** Cellulose Acetate
- B. **INDICATOR NEEDLE:** Red HDPE plastic
- C. **LOCK NUT:** Red plastic to hold L Head in place. (**options**-aluminum lock nut)
- D. **DURO NITRILE GASKET:** On which flanges on base of calibration assembly are firmly seated to prevent leakage. (**options**-viton gasket)
- E. **ALUMINUM DIE CAST BUSHING:** Type L-1.5 fits 1.5” standard npt tank flange. Type L-2 fits standard 2” npt tank flange. **L-1-5/16”** is a stainless weld on flange.
- F. **BRASS RIVETS:** One brass tubular rivet. (**options**-stainless)
- G. **FLOAT ARM ASSEMBLY:** 0.1875 x 0.0625 galvanized steel flat rod, attached to indicator. (**options**-stainless steel)
- H. **PLASTIC FLOAT:** High density polyethelene float 1.125” dia. x 3.0” long. (**options**-stainless float, nitrophyll float, 3/4” float)

L-Gauges are manufactured to fit specific tank sizes from 6” to 30”. Float rod is varied in length to accommodate different depths.

**Ordering information**—Part numbers are as follows: L-(opening)-(Depth). Example—L-2-6”.

**KRUEGER SENTRY GAUGE**

**KRUEGER SENTRY GAUGE CO. INC.**  
1873 Siesta Lane: Green Bay, WI 54313-8021  
Phone:(920) 434-8860 : Fax (920) 434-8897  
Office Hours: 7:00 A.M. to 5:00 P.M. (CST)  
<http://www.kruegersentrygauge.com>