

SPECIFICATIONS

RESISTANCE: 1200 OHMS ±20%

INDUCTANCE: 400 mH ±25%

OUTPUT: 0.5 V P-P MIN. UNDER
THE FOLLOWING CONDITIONS:

TEST GEAR: SINGLE TOOTH (XC#192)


VELOCITY: 10 IPS

AIR GAP: 0.050"


LOAD: 100 KOHM

POLARITY: WHITE LEAD POSITIVE WITH
RESPECT TO BLACK LEAD WITH
THE APPROACH OF FERROUS METAL

TEMPERATURE: -40°C TO +107°C

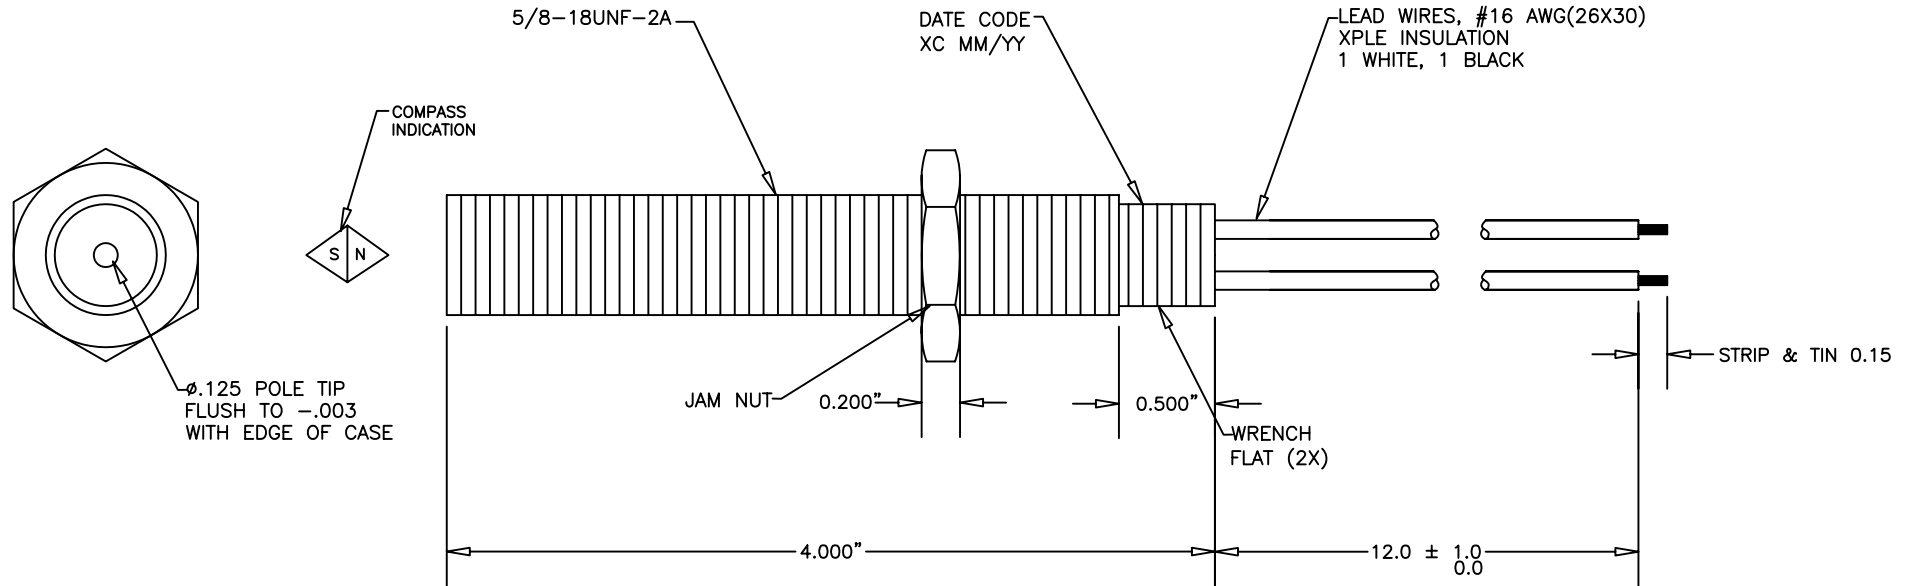

CASE AND NUT MATERIAL: 303 STAINLESS STEEL

UNLESS OTHERWISE SPECIFIED:	 Panelsource Engine & Generator Controls		DRAWN BY:	SCALE:
			BK	NONE
ALL WIRES 16GA	TITLE: DSC8933 5/8" MAGNETIC PICKUP		CHECKED:	DATE:
DO NOT SCALE DRAWING				08/14/06
PURCHASE ORDER:			DRAWING NUMBER:	
			DSC8933.DWG	
			SHEET 1 OF 1	

* DISCLAIMER, WE RESERVE THE RIGHT TO CHANGE ANY, OR ALL OF THE INFORMATION ON THIS SCHEMATIC WITHOUT NOTIFICATION.