


P6-700.3F STANDARD REMOTE ANNUNCIATOR

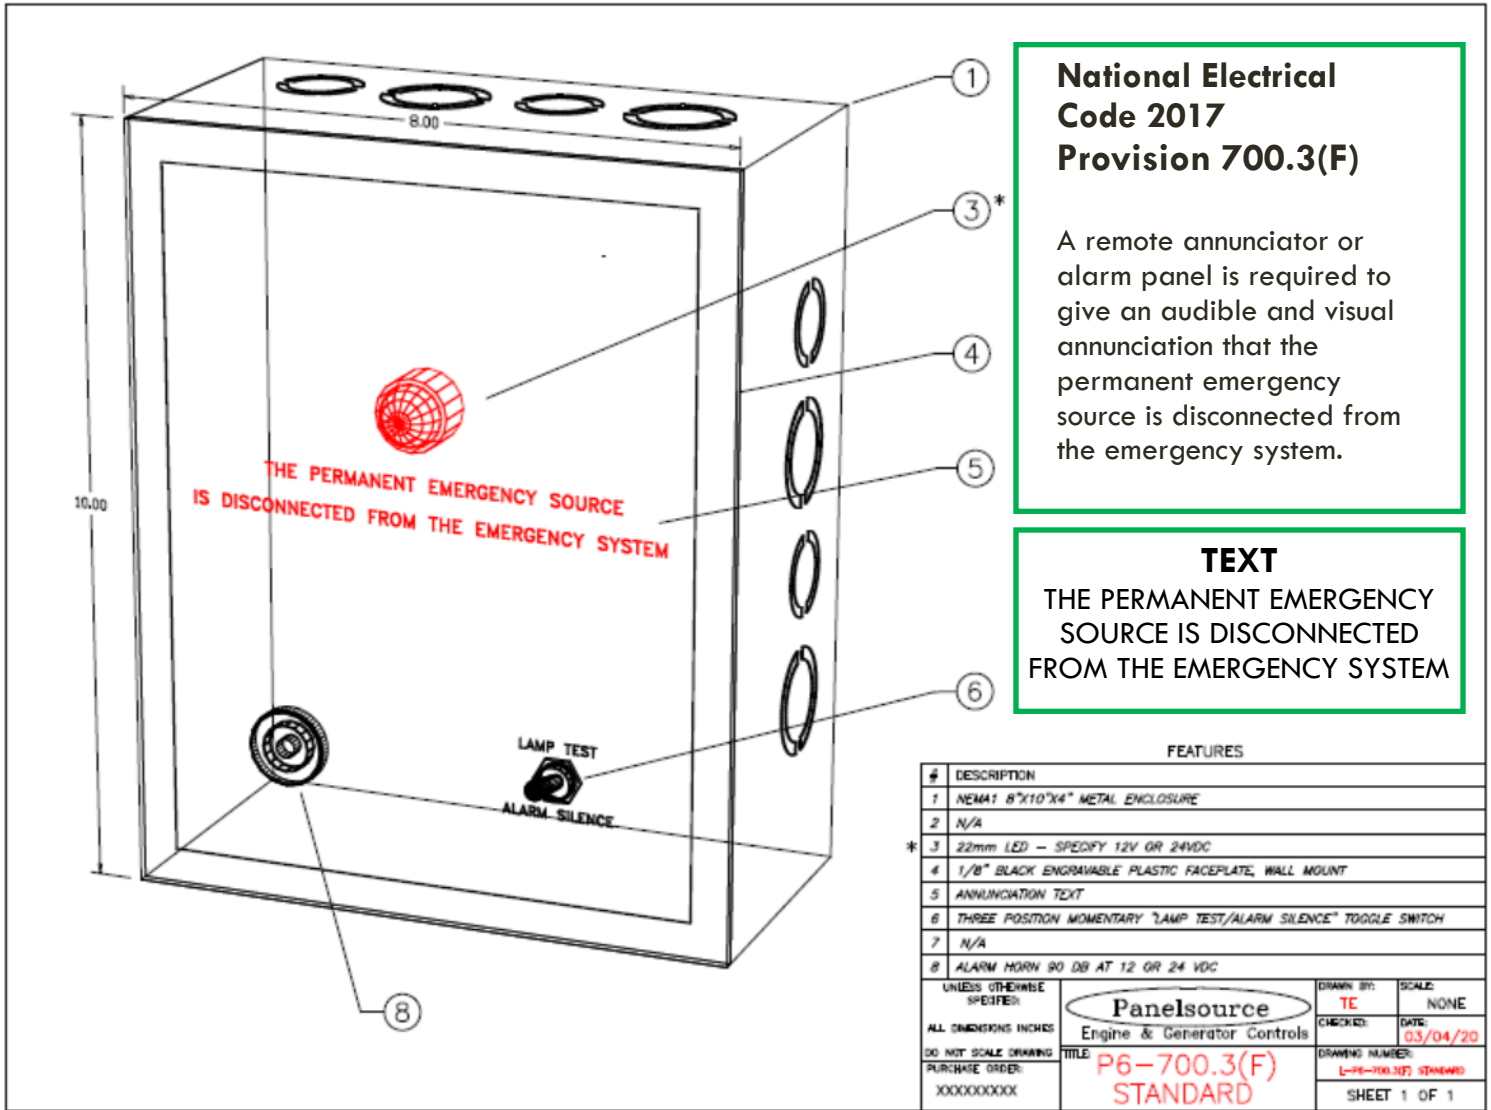

National Electrical Code 2017 Provision 700.3(F)

A remote annunciator or alarm panel is required to give an audible and visual annunciation that the permanent emergency source is disconnected from the emergency system.

TEXT

THE PERMANENT EMERGENCY SOURCE IS DISCONNECTED FROM THE EMERGENCY SYSTEM

FEATURES																	
#	DESCRIPTION	UNLESS OTHERWISE SPECIFIED:															
1	NEMA 1 8"x10"x4" METAL ENCLOSURE																
2	N/A																
3	22mm LED - SPECIFY 12V OR 24VDC																
4	1/8" BLACK ENGRAVABLE PLASTIC FACEPLATE, WALL MOUNT																
5	ANNUNCIATION TEXT																
6	THREE POSITION MOMENTARY "LAMP TEST/ALARM SILENCE" TOGGLE SWITCH																
7	N/A																
8	ALARM HORN 90 DB AT 12 OR 24 VDC																
		<div style="text-align: center;"> <p>Panelsource Engine & Generator Controls</p> </div>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>DRAWN BY:</td> <td>SCALE:</td> </tr> <tr> <td>TE</td> <td>NONE</td> </tr> <tr> <td>CHECKED:</td> <td>DATE:</td> </tr> <tr> <td></td> <td>03/04/20</td> </tr> <tr> <td colspan="2">DRAWING NUMBER:</td> </tr> <tr> <td colspan="2">L-PE-700.3F STANDARD</td> </tr> <tr> <td colspan="2" style="text-align: center;">SHEET 1 OF 1</td> </tr> </table>	DRAWN BY:	SCALE:	TE	NONE	CHECKED:	DATE:		03/04/20	DRAWING NUMBER:		L-PE-700.3F STANDARD		SHEET 1 OF 1	
DRAWN BY:	SCALE:																
TE	NONE																
CHECKED:	DATE:																
	03/04/20																
DRAWING NUMBER:																	
L-PE-700.3F STANDARD																	
SHEET 1 OF 1																	
ALL DIMENSIONS INCHES DO NOT SCALE DRAWING PURCHASE ORDER: XXXXXXXXX		TITLE: P6-700.3(F) STANDARD															

STANDARD FEATURES

- Engraved 3-Ply Plastic
- Single 22 mm Red LED
- Visual & Audible Indication
- Alarm Silence / Lamp Test Switch
- Input Selectable Horn
- Surface Mount
- NEMA 1 8" X 10" X 4" Enclosure
- DC Positive Input Switching
- 12 or 24 Volts DC
- Fully Sealed Logic Module

OPTIONAL

- Flush Mount
- Inverter for DC Negative Inputs