


**CAUTION  
HOT SURFACE**  
THE SPACE HEATER BELOW THIS SURFACE MAY BE ENERGIZED. DISCONNECT ALL POWER BEFORE SERVICING. THIS HEAT SHIELD MUST BE REINSTALLED AFTER SERVICING.  
A-525590

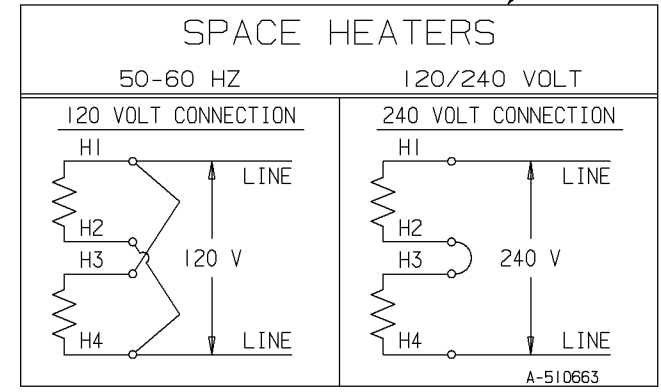

NOTES:

- 1- ALIGN THE SPACE HEATERS AND GUARDS WITH THE PREDRILLED HOLES IN THE FRONT BRACKET AND MOUNT WITH THE THE SCREWS PROVIDED IN THE SPACE HEATER KIT.
- 2- APPLY THE SPACE HEATER CONNECTION DECAL (ITEM 5) NEAR THE BOTTOM OF THE CONDUIT BOX IN A VISIBLE LOCATION. (AS SHOWN)
- 3- WIRE THE SPACE HEATERS TO EITHER 120 VOLTS OR 240 VOLTS ACCORDING TO THE CONNECTION DIAGRAM. INSULATE THE CONNECTIONS.

ITEM	PART NO.	DESCRIPTION	QTY
1	A-21138-32	SPACE HEATER	2
2	A-525591	GUARD	2
3	A-9646-75	SCREW	4
4	A-525590	DECAL - CAUTION	2
5	A-510663	DECAL - CONNECTION	1
6	A-57829B	MARKER	8
7	L6H16W-24EE	LEAD ASSY	4
	A-2039-1	TERMINAL-E	2

TOTAL GENERATOR WATTAGE: 250 WATTS

4	1-30-89	CORRECT LINE TO LINE VOLTS FROM 120 TO 240 TO MATCH DECAL A-510663	TM	<input checked="" type="checkbox"/> SURFACE ROUGHNESS UNLESS NOTED OTHERWISE MATL SPEC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL ON XX± XXX±.005 XXXX±.0005 ANGLES±	DRAWN BY TM	11-18-88
3	1-20-89	REISSUE	TM			FINISH	MARATHON ELECTRIC WAUSAU, WISCONSIN 54401
2	11-18-88	REDRAWN ON CAD	TM			APPD BY AG	11-18-88
REV	DATE	CHANGE	NAME	PART NAME SPACE HEATER KIT 430 FR. GEN. 120/240 VOLT		DRWG NO B-525756	